






↓	<i>Model</i>	TA 31101		
	<i>Code Production</i>	T101INF2D ... (exit right) T101INF2S ... (exit left)		
	Interface :			
				
↕	<i>Overall Dimension (Width-Depth-Height) *open</i>		mm	1.150 x 770 x 1.615(2088*)
	<i>Packaging Dimension (WxDxH)</i>		mm	1.280x920x1800
	<i>Gross weight</i>		Kg	240
	<i>Net weight</i>		Kg	200
	<i>Volume</i>		mc	2,3
□	<i>Rack size</i>		mm	500x500
	<i>Useable wash chamber height</i>		mm	450
	<i>Tank wash construction</i>			deep drawn
	<i>Tank pre-wash construction</i>			-
	<i>General construction</i>			double skin
	<i>Door Construction</i>			double skin and insulated
↘	<i>Wash Tank volume</i>		liter	70
	<i>Wash Tank heating element</i>		W	10.500
	<i>Wash Tank surface strainers</i>			stainless steel
	<i>Wash drawer-like strainers</i>			No
	<i>Pre-Wash Tank volume</i>		liter	-
	<i>Pre-Wash Tank heating element</i>		W	-
	<i>Pre-Wash Tank surface strainers</i>			-
	<i>Pre-Wash drawer-like strainers</i>			-
⚙️	<i>Wash pump type</i>			double flow
	<i>Wash pump power</i>		W	1.500
	<i>Wash pump delivery</i>		Lt/min	720
	<i>Wash temperature</i>		°C	60
	<i>Pre-Wash pump type</i>			-
	<i>Pre-Wash pump power</i>		W	-
	<i>Pre-Wash temperature</i>		°C	-
↘	<i>Boiler volume</i>		liter	17
	<i>Boiler heating element (with 50°C inlet water) standard</i>		W	9.500
	<i>Boiler heating element (with 10°C inlet water)</i>		W	16.000
	<i>Boiler heating element (with 10°C inlet water +Recovery)</i>		W	12.000
	<i>Back-flow system</i>			valve
⚙️	<i>Rinse type</i>			single rinse
	<i>Pre-Rinse</i>			-
	<i>Rinse temperature</i>		°C	82
	<i>Rinse water consumption</i>		Liter /hour	160
	<i>Inlet water temperature</i>		°C	Cold:10-40°C Hot:45-60°C
	<i>Optimal external water pressure</i>		bar	from 2 to 4

	Drain system		overflow
	Drain size	G	1' ½"
	Productivity – speed 1	Racks per hour	120
	Productivity – speed 2	r/h	60
			-
	Noise level	db	< 70
	Conveyor power	W	500
	Electric Connection	V - ph - Hz	400V 3N 50Hz
	Max Electric Power with 50°C standard	W	22.000
	Max Electric Power with 10°C	W	28.500
	Max Electric Power with 10°C +recovery	W	24.700
	Plates racks	Nr1	780072
	Flat Rack	Nr1	780135
	Cutterly Rack	Nr1	780139
	Electric cable		not included
	Drain hose		YES
	Fill hose		YES

	Rinse aid and detergent dispenser	Optional
	Increase power for cold feed	Optional
	Drying tunnel	Optional
	Drying tunnel on 90° curve	Optional
	Heat recovery system	Optional
	Chemical product's level probe	Optional
	Pressure reducer with manometer	Optional
	Emergency switch	Optional
	End limit switch	Optional

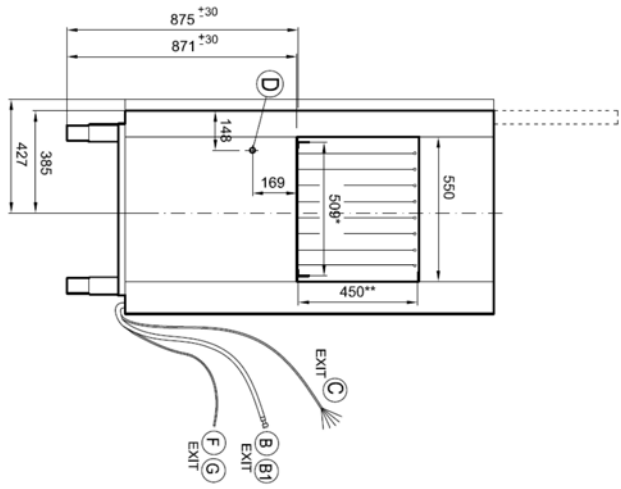


* USEFUL WIDTH FOR BASKET
 ** USEFUL HEIGHT FOR BASKET

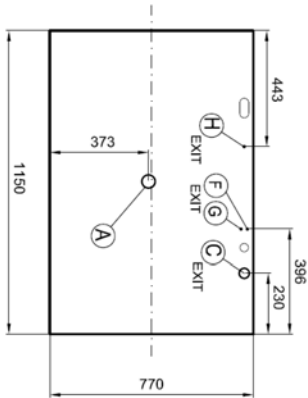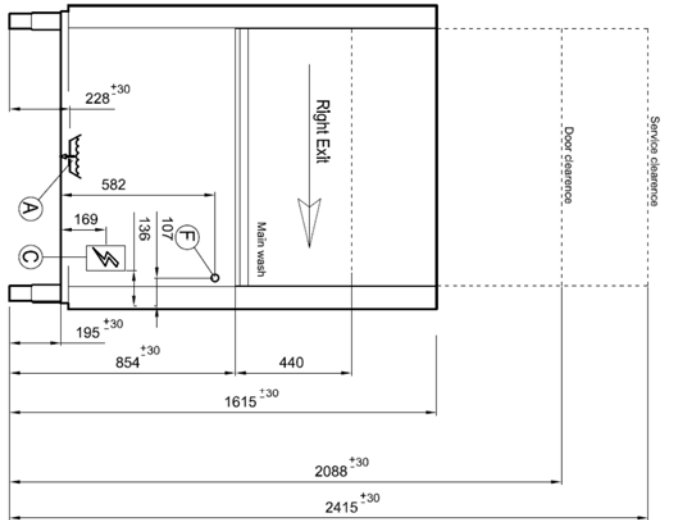



A		Ø 1"1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent Inlet
B1		G 3/4" M	G		Ø 7 M	Rinse aid Inlet
C		PG36	H		Ø 6	Equipotential

L		Ø 250	Dryer suction
---	--	-------	---------------

Installation layout		Rack Type	
Designed by:	M.P.UCCI	Denomination:	T101D
Date:	15/05/2015	Code:	00
		Rev.:	

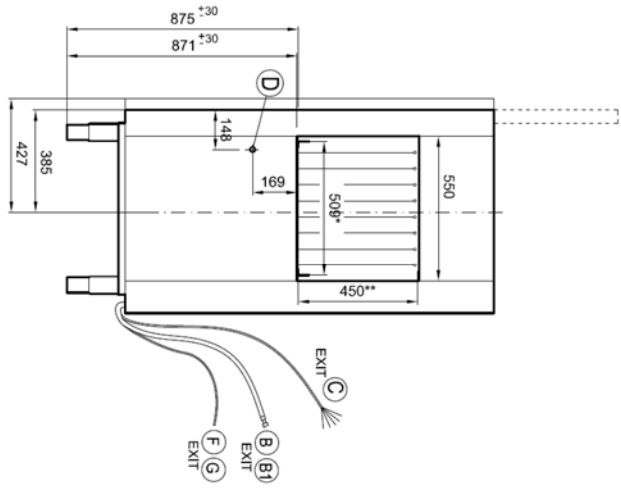

* USEFUL WIDTH FOR BASKET
 ** USEFUL HEIGHT FOR BASKET

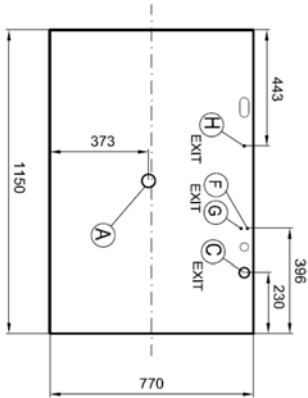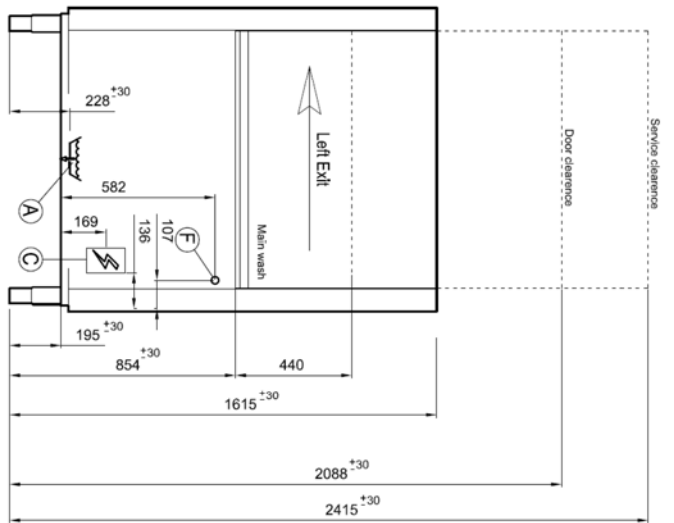

A		Ø 1"1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent inlet
B1		G 3/4" M	G		Ø 7 M	Rinse add inlet
C		PG36	H		Ø 6	Equipotential

L		Ø 250	Dryer suction
---	--	-------	---------------

Installation layout		Rack Type	
Designet by:	M.P.UCCI	Denomination:	T101S
Date:	15/6/2015	Code:	00
		Rev.:	

