

IL750CHV-V / IL900CHV-V / IL1100CHV-V



EHC2000DEHC

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
We reserve the right to change specifications without prior notice
Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis



IL750CHV-V / IL900CHV-V / IL1100CHV-V

EHC1500DEHC / EHC2000DEHC / EHC2500DEHC / EHC1970DETHC			
Rango Tª / Operating temp / Régime de Température	-18°C / -25°C		
Clase climática / Climate class / Classe climatique	3L1		
Capacidad / Capacity / Capacité (l)	459 652 805		
Medidas exteriores LxFxA / Overall dimensions LxDxH / Dimensions extérieures LxIxH (mm)	1550 x 960 x 780 2050 x 960 x 780 2500 x 960 x 780		
Características constructivas / Cabinet Construction / Caractéristiques du fabricant			
Material exterior / Exterior Material / Matériau extérieur	Chapa revestida de PVC	PVC coated sheet	Feuille PVC couchée
Material interior / Interior Material / Matériau intérieur	Chapa revestida de PVC	PVC coated sheet	Feuille PVC couchée
Iluminación LED / LED lighting Eclairage LED	✓		
Tipo aislamiento / Insulation / Type d'isolation	Poliuretano con densidad 40kg/m ³ , libre CFCs, cero ODP y bajo GWP	Polyurethane with high density 40kg/m ³ , CFCs free, zero ODP and low GWP	Isolation en polyuréthane injecté à haute pression de CFC avec une densité de 40kg/m ³ , Zéro ODP et GWP faible.
Espesor aislamiento / Insulation thickness / Epaisseur de l'isolation (mm)	60		
Dotación / Features / Equipement de série			
Tipo de puerta / Door construction / Type de porte	Tapa corredera de cristal curvado	Curved glass sliding cover	Couvercle coulissant en verre incurvé
Marcos puerta calefactados / Door frame heaters / Cordon chauffant encadrement porte	✓		
Características frigoríficas / Refrigeration / Caractéristiques du froid			
Controlador / Thermostat / Thermostat	Digital	Digital	Digital
Desescarche / Defrost / Dégivrage	Manual	Manual	Manuel
Ventiladores electrónicos / Electronic fans / Ventilateurs électroniques	✓		
Sistema de condensación / Condensation / Système de condensation	Ventilada	Ventilated	Ventilé
Sistema de evaporación / Evaporation / Système d'évaporation	Estática	Static	Statique
Datos técnicos / Technical Features / Informations techniques			
Refrigerante / Refrigerant / Gaz réfrigérant	R290		
Tensión/fases/frecuencia / Power Supply / Tension /phase/Fréquence	220-240V / 1 / 50 Hz		
Potencia / Power / Puissance (W)	345		
Intensidad / Amps / Intensité (A)	2,5		
Consumo / Energy Consumption / Consommation (kWh/24h)	3,9 4,5 4,9		



Paletización / Crating / Palettisation	
Medidas paletización LxFxA / Crated dimensions / Dimensions palettisation L x l x H (mm)	1640 x 1030 x 840
	2140 x 1030 x 840
	2590 x 1030 x 840
Volumen bruto / Crated volume / Volume brut (l)	597
	839
	1032
Peso neto / Net Weight / Poids net (kg)	81
	105
	125
Peso paletización / Crated Weight / Poids palettisation (kg)	137
	160
	200

IL750CHV-V / IL900CHV-V / IL1100CHV-V



ALZADO/ ELEVATION/ VUE LATÉRAL

PERFIL / RIGHT VIEW/ VUE EN PLAN



PLANTA/PLAN VIEW/DESSUS/VUE DE PROFIL

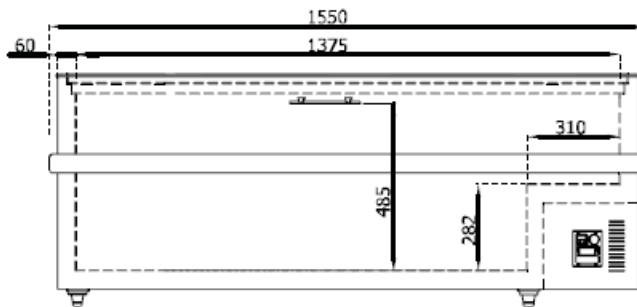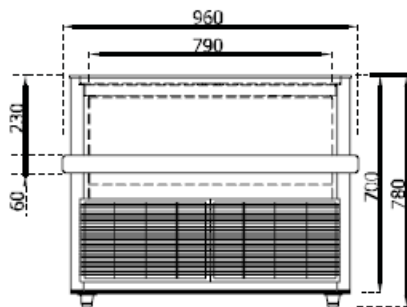

IL750CHV/V

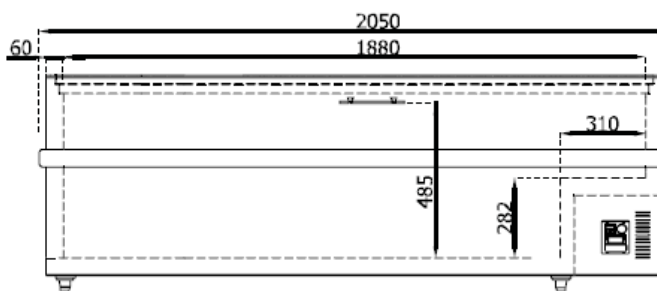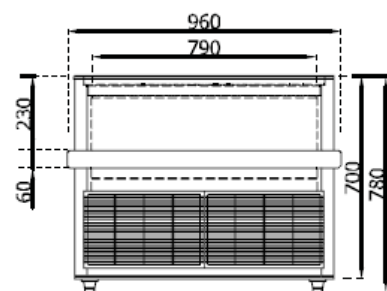

IL900CHV/V

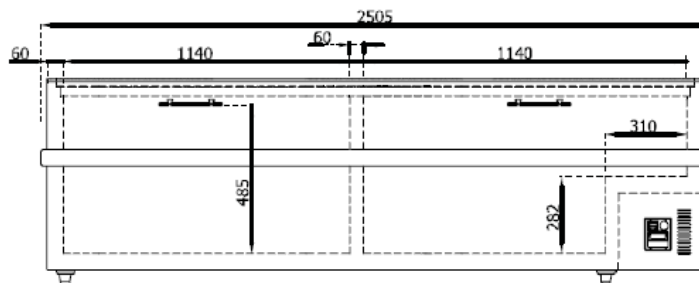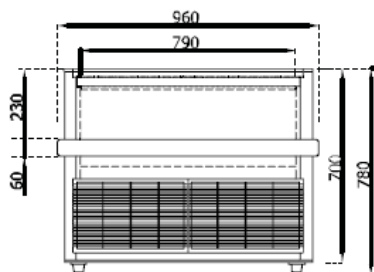

IL1100CHV/V

www.infrico.com
info@infrico.com

Ctra. de Aguilar A-318 por Moriles Km. 15,5 – A-3132 - 14900, Lucena (Córdoba)

Características técnicas y constructivas sujetas a variación sin previo aviso
 We reserve the right to change specifications without prior notice

Les caractéristiques techniques et la conception peuvent être sujettes à modifications, sans préavis

