
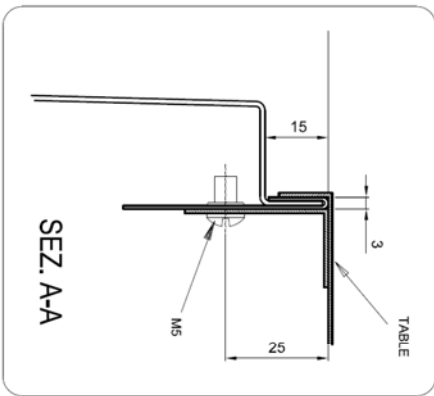
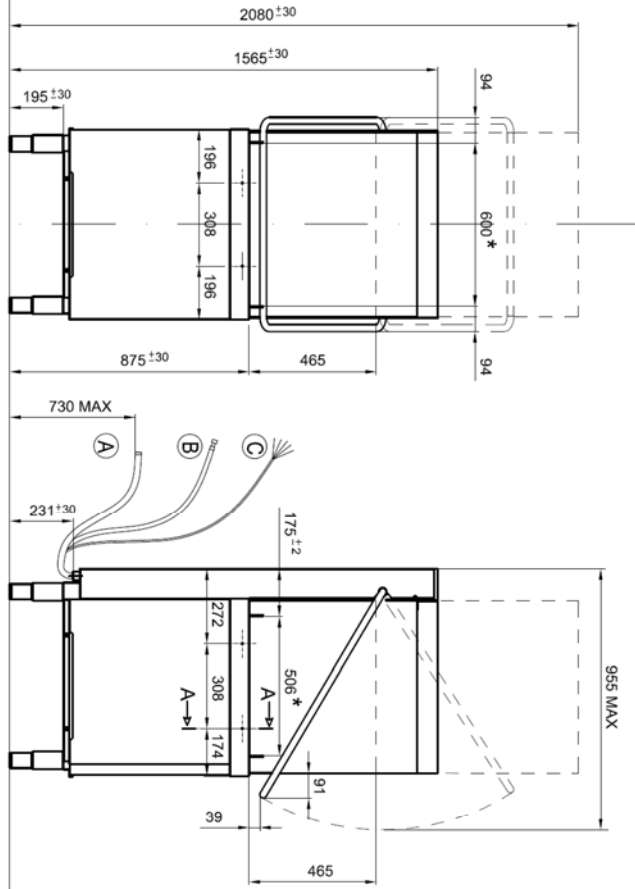



↓	<b>Model</b>	<b>LCP4560EDBD</b>	
	<b>Code Production</b>	<b>TT3921INFCDD</b>	
Interface :			
↕	<b>Overall Dimension (Width-Depth-Height) *open</b>	<b>mm</b>	<b>788 - 835 - 1565(*2080)</b>
	<b>Packaging Dimension (WxDxH)</b>	<b>mm</b>	<b>870x830x1540</b>
	<b>Gross weight</b>	<b>Kg</b>	<b>130</b>
	<b>Net weight</b>	<b>Kg</b>	<b>120</b>
	<b>Volume</b>	<b>mc</b>	<b>1,10</b>
□	<b>Rack size</b>	<b>mm</b>	<b>500x600</b>
	<b>Max door /hood opening</b>	<b>mm</b>	<b>465</b>
	<b>Max glasses/plate Height</b>	<b>mm</b>	<b>440</b>
	<b>General construction</b>		<b>double skin</b>
	<b>Door/hood Construction</b>		<b>double skin</b>
↘	<b>Tank construction</b>		<b>fully deep drawn</b>
	<b>Tank volume</b>	<b>liter</b>	<b>30</b>
	<b>Tank heating element</b>	<b>W</b>	<b>2500</b>
	<b>Tank surface strainers</b>		<b>Yes-composite</b>
⚙️	<b>Wash pump type</b>		<b>double flow</b>
	<b>Wash pump power</b>	<b>W</b>	<b>1500</b>
	<b>Wash temperature</b>	<b>°C</b>	<b>60</b>
↘	<b>Boiler type</b>		<b>pressurized</b>
	<b>Boiler volume</b>	<b>liter</b>	<b>6</b>
	<b>Back-flow system</b>		<b>valve</b>
	<b>Boiler heating element</b>	<b>W</b>	<b>8000</b>
⚙️	<b>Rinse booster pump</b>		<b>no</b>
	<b>Rinse booster pump power</b>	<b>W</b>	<b>-</b>
	<b>Rinse temperature</b>	<b>°C</b>	<b>80</b>
	<b>Rinse water consumption</b>	<b>Liter /rack</b>	<b>2,6</b>
	<b>Optimal external water pressure</b>	<b>bar</b>	<b>2 - 4</b>
🚰	<b>Drain system</b>		<b>partial drain</b>
	<b>Drain pump</b>		<b>standard built in</b>
▶	<b>Rinse aid dispenser</b>	<b>peristaltic</b>	<b>YES</b>
	<b>Detergent dispenser</b>	<b>peristaltic</b>	<b>YES</b>
👤/👤	<b>Wash cycle</b>	<b>sec</b>	<b>60 - 120 - 150 - continuous</b>
⚡	<b>Electric Power</b>	<b>W</b>	<b>9500</b>
	<b>Electric Connection</b>	<b>V - ph - Hz</b>	<b>400V 3N 50Hz</b>
	<b>Fuse</b>	<b>A</b>	<b>20</b>
▶	<b>Plates racks</b>	<b>n° 1</b>	<b>70180</b>
	<b>Flat Rack</b>	<b>n° 1</b>	<b>70181</b>
	<b>Cutterly Rack</b>	<b>n° 1</b>	<b>780081</b>
	<b>Electric cable</b>	<b>n° 1</b>	<b>YES</b>
	<b>Drain hose</b>	<b>n° 1</b>	<b>YES</b>
	<b>Fill hose</b>	<b>n° 1</b>	<b>YES</b>

A		∅ 32 mm
B		G 3/4"
C		Power supply

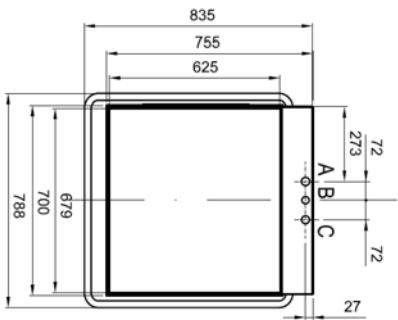

\* LUCE UTILE PER CESTELLO  
 USEFUL SPACE FOR BASKET  
 LUMIERE OUTIL POUR PANIER  
 NUTZBARER OFFENUNG FÜR KORBE  
 ABERTURA UTIL PARA CESTO

Designed by:	M.PUCCI	Date:	01.12.2013	Determination:	Hood type with drain pump	Code:	70991	Rev:	02
--------------	---------	-------	------------	----------------	---------------------------	-------	-------	------	----

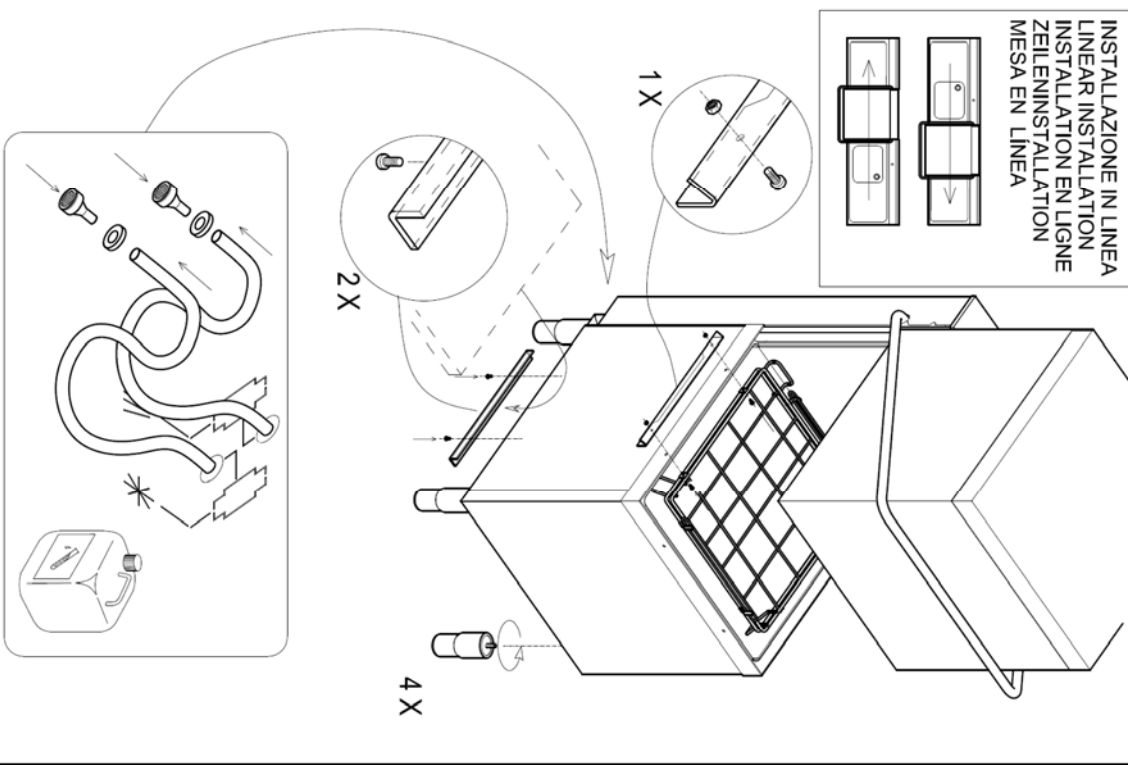

INSTALLAZIONE IN LINEA  
 LINEAR INSTALLATION  
 INSTALLATION EN LIGNE  
 ZEILENINSTALLATION  
 MESA EN LINEA